gerflor.com gerflor.asia










EASYCARE™

34-43



MIPOLAM® CONCEPT™





- ① EASYCARE™ surface treatment
- ② Compacted homogeneous floorcovering
- ☐ High performance flexible homogeneous multipurpose flooring
- EASYCARE[™] surface treatment: Ease of maintenance
- ☐ High traffic & wear resistance
- ☐ Incorporate bacteriostatic and fungistatic activity
- ☐ Antistatic
- ☐ Non-directional polychrome design, available in a large choice of 25 contemporary colours

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable, the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor⊕ matching welding rod.

MAINTENANCE

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.





Surface treatment innovation

EASYCARE™, our brand new surface treatment, is our latest innovation in surface treatment.

- ☐ Good resistance to chemicals and scuffing
- ☐ High resistance to scratches and staining
- ☐ Easy to clean
- □ No wax for life

Performances and benefits



Matt finish surface: enhanced design & colour



Homogeneous vinyl flooring suitable for heavy duty traffic areas



Available in 2 m sheet



Non-directional design available in 25 references



Highly flexible homogeneous flooring, easy to install & weld

LOW VOC EMISSION, GOOD INDOOR AIR QUALITY



COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



WELLNESS

Health

 Antibacterial activity (inhibits growth > 99 %)

Safety

Good slip resistance

Comfort

• Walking comfort < 75 dB



RECYCLED CONTENT

- 25% recycled content
- 100 % REACH compliant recycled content



RECYCLABILITY

• 100% recyclable product



INDOOR AIR QUALITY

- TVOC emissions 100 times lower than norm requirements (TVOC < 10 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



LCA

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Patented surface treatment Evercare[™] to reduce drastically the use of chemical products and water and ensure the lowest environmental impact


















5046 Sesame Seed



5030 Toffee



5048 Fairydust






5049 Grey Peanut



5042 Tiramisu

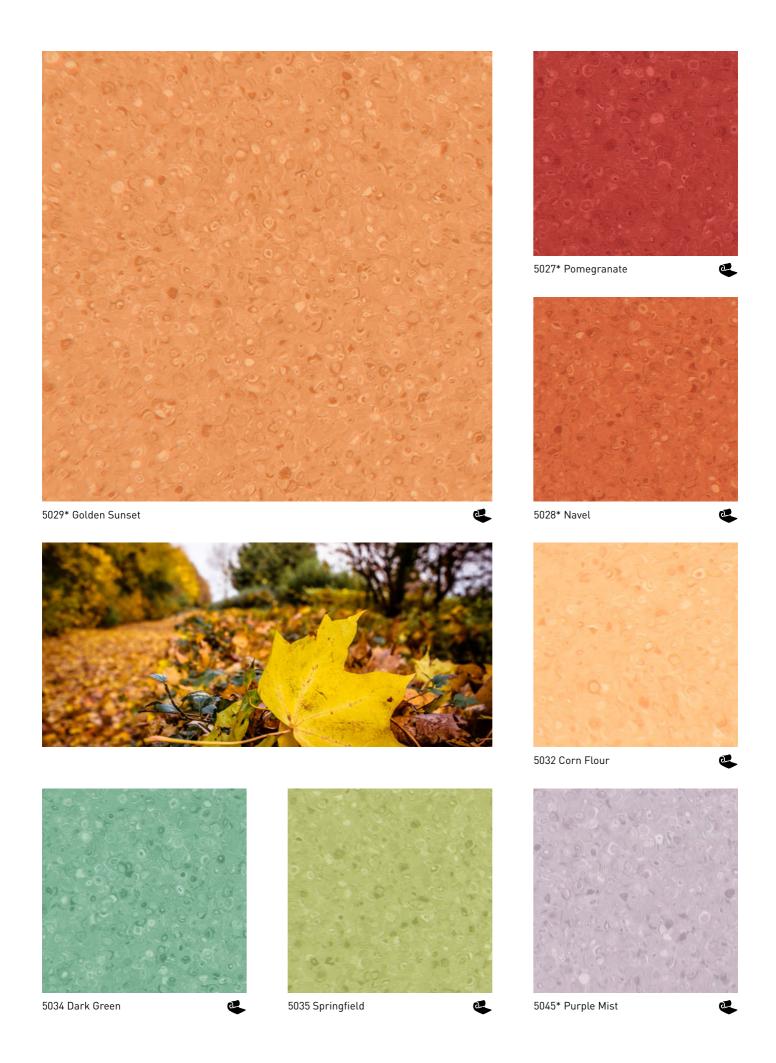














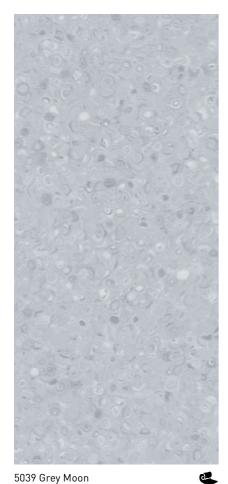














5047 Middle Marlyn

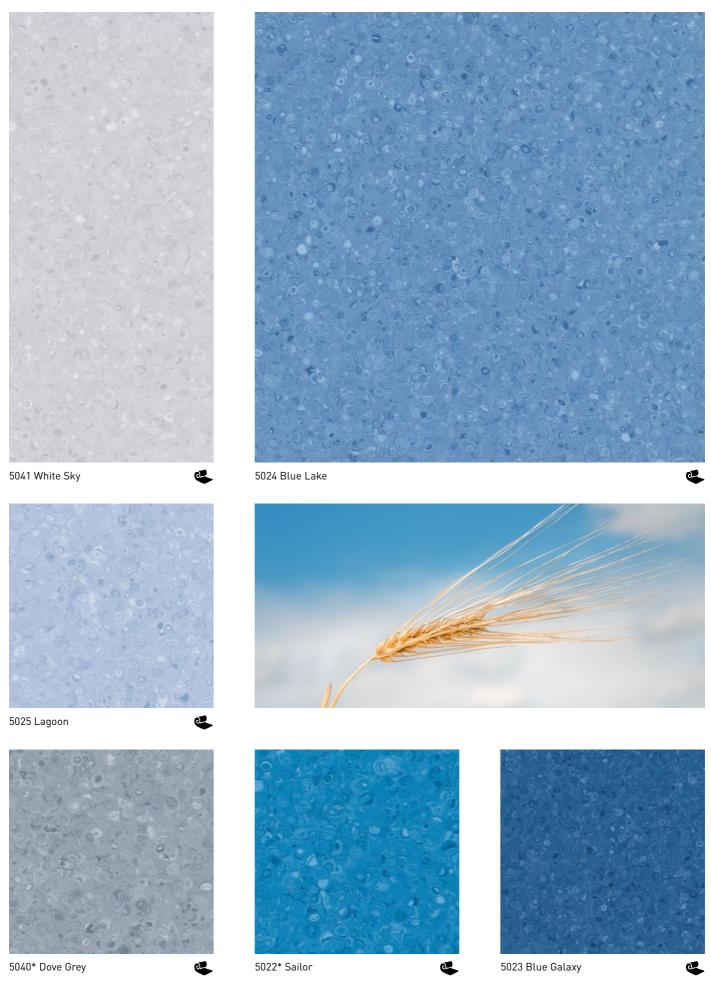

JAN 01-15-2021 Version - Indicative documentation cost USD 3.77 Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.

MIPOLAM® CONCEPTTM easycare



MIPOLAM® CONCEPT™

DESCRIPTION

Total thickness	ISO 24346 (EN 428)	mm	2
Weight	ISO 23997 (EN 430)	g/m²	2980
Width of sheet	ISO 24341 (EN 426)	cm	200
Length of sheet	ISO 24341 (EN 426)	lm	20

CLASSIFICATION

Norm / Product specification	-	-	ISO 10581 (EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	<2
Electrical resistance	EN 1081	Ω	10°-10¹0
Slip resistance dry	EN 13893	-	≽0.3
Slip resistance wet	DIN 51130	class	R9

DEDECORMANCES

Type binder content	ISO 10581	type	aal
Dimensional stability	ISO 23999 (EN 434)	%	€ 0.4
Castor chair test	ISO 4918 (EN 425)	-	0K
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.K)	0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical products resistance	ISO 26987 (EN 423)	-	OK
Anti-bacterial activity	JIS Z 2801		>99%
(E.coli - S.aureus - MRSA)(1)	JIS Z 2801	-	Inhibits growth
Surface treatment	-	-	EASYCARE™
Color number	-	-	25

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	μg/m³	<10
Certification	-	_	Floorscore®

CE MARKING

(6	EN 14041	-	
(6			Bra1

(1) The implementation of an effective cleaning regime is the most important defence against infections.

MIPOLAM® CONCEPT™ is a flexible homogeneous pressed compacted floorcovering in sheet, with non-directional design color dyed as a raw mixture to ensure color $throughout \, the \, thickness. \, Its \, surface \, is \, densely \, compacted \, for \, improved \, wear \, and \, ease \,$ of maintenance. It benefits from EASYCARE™ surface treatment with good resistance to chemicals and to scuffing, and high resistance to scratches and staining. Easy to clean. No wax for life! It is suitable for heavy traffic areas.

 $\textbf{MIPOLAM}^{\circledcirc} \ \textbf{CONCEPT}^{\, \intercal M} \ features \ bacterio static \ and \ fungistatic \ treatment.$

Don't forget our complementary ranges!









MIPOLAM® CONCEPTTM, **ACTIONS SPEAK LOUDER THAN WORDS**



100 % REACH compliant



INDOOR **AIR QUALITY**

100 times lower than norm requirements (TVOC < 10 µg/m³ after 28 days)



RECYCLED CONTENT

25%



RECYCLABILITY 100%



Eco-designed according to a product specific

life cycle analysis



Be connected!













#Gerflor







