



MIPOLAM 160

gerflor.ae



NEW COLLECTION

Gerflor[®]
theflooringgroup

MIPOLAM 160



3007



3008



3006



3005



3013





3010



3015



3014




3009



3016



3018

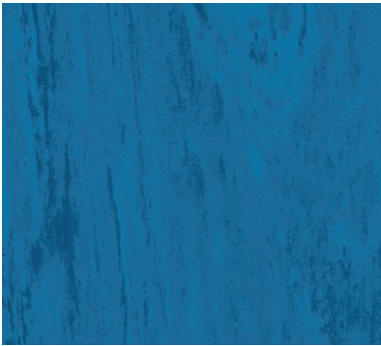

3011



3023



3001

MIPOLAM 160 is a high performing flexible monolayer homogeneous multipurpose flooring especially recommended for hospitals, schools, offices, supermarkets and institutional buildings, where an easy to maintain and hardwearing floorcovering with a modern appearance is required.

The directional design in 2m sheets with colour throughout the thickness is available in 14 references.
This product receives a PUR PROTECT surface treatment: a good foundation for routine maintenance.
The flooring is group P wear rating suitable for medium to heavy traffic areas.

Mipolam 160			
DESCRIPTION			
Total thickness	EN ISO 24346 (EN 428)	mm	2.00
Weight	EN ISO 23997 (EN 430)	g/sq.m	3300
Width/length of sheet	EN ISO 24341 (EN 426)	cm/lm	200/20
CLASSIFICATION			
Norm/product specification	-	-	EN ISO 10581 (EN 649)
European classification	EN ISO 10874 (EN 685)	class	34-43
Fire rating	EN 13501-1	class	Bfl - s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130 / BGR 181	class	R9
PERFORMANCE			
Wear resistance	EN 660.2	mm³	≤ 4.0
Wear group	NF 189	group	P
Type binder content	ISO 10581	type	II
Dimensional stability	EN ISO 23999 (EN 434)	%	≤ 0.40
Residual indentation	EN ISO 24343-1 (EN 433)	mm	≈ 0.03
Castor chair test (type W)	ISO 4918 (EN 425)	-	OK
Thermal conductivity	EN ISO 10456 (EN12524)	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR PROTECT
Chemical products resistance	EN ISO 26987 (EN 423)	class	OK
Anti-bacterial and fungicidal	-	-	OK
Color number	-	-	14
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m³	< 10
CE marking			
CE	EN 14041	-	